



a q u a s a n a[®]
Home Water Filters

COUNTERTOP/UNDERCOUNTER REPLACEMENT CARTRIDGES

REPLACEMENT CARTRIDGE INSTRUCTIONS

**IMPORTANT! READ THESE INSTRUCTIONS COMPLETELY BEFORE
INSTALLING THE REPLACEMENT CARTRIDGES.**

This product is intended for use on potable cold water supplies only and is not designed for use with water with unsafe or unknown bacteriological quality. For specific contaminant reduction claims see the Performance Data Sheet on our website at www.aquasana.com

1 With the filter system lying flat on your countertop and hoses still connected, as shown in **figure A**, **remove the threaded filter caps** by turning in the direction of the arrows.

NOTE: If filter caps are too tight to loosen by hand, remove the hose by pressing the gray collet while pulling the hose out, then place an 11/16" socket wrench over the hexnut in the center of the cap. Turn socket wrench in the direction of the arrows to loosen.

2 **Remove both filter cartridges.** These cartridges may be disposed of with your trash, as they pose no environmental hazard. Reuse existing O-Rings as they have a 10 year life cycle.

3 Check to make sure that the housing O-Rings are still in place as shown in **figure B**. Next, **rub the provided FDA silicone around exposed surface of the housing O-Ring** to ensure a proper seal.

4 As shown in **figure A**; install the new filter cartridges with the "A" cartridge being placed in the "A" housing core, with the O-Ring end first. Install the "B" cartridge into the "B" housing core with the O-Ring end last.

INSTRUCTIONS CONTINUE ➔

figure A



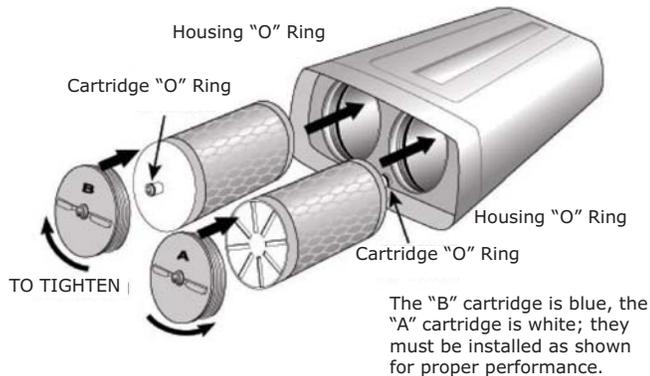


figure B


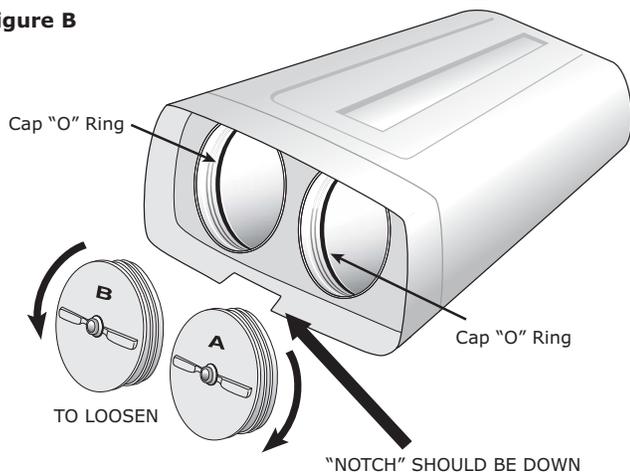


NOTE

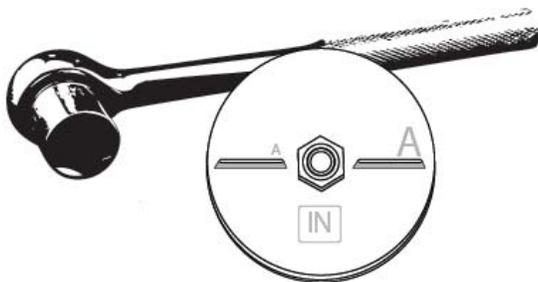

11/16" Socket Wrench
(Not Included)

figure C

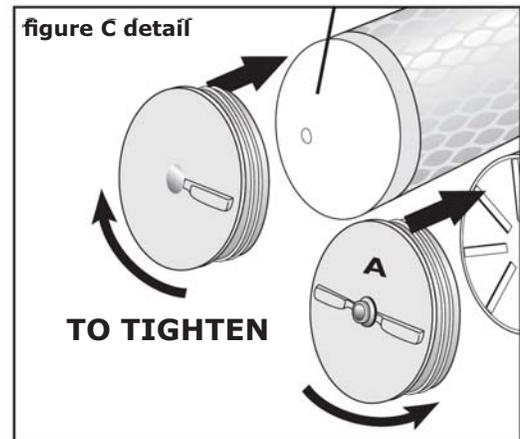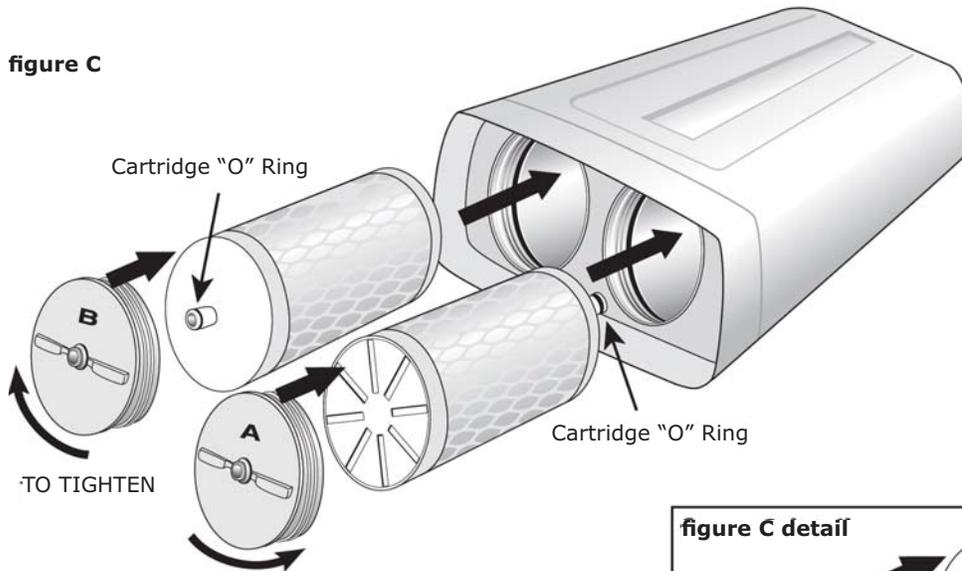

5 Once the filter cartridges have been inserted into the correct housing cores, **reinstall the threaded caps** by first making sure that the housing O-Rings are in place and that you coated them lightly with the FDA Silicone provided. The silicone allows the surface of the threaded cap to glide smoothly on the O-Ring surface for equal compression and to avoid kinking or dislodging of the O-Ring which will result in leaking. The threaded filter caps should be tightened by hand firmly in the opposite direction of the arrows shown on the caps. The "A" cap will tighten by turning it to the left (counter-clockwise). The "B" cap will tighten by turning it to the right (clock-wise) as shown in **figure C detail**.

6 With the filter still lying on its side, turn on the cold water and activate the faucet diverter. Allow the water to run and check for leaks around the threaded caps. If any leaks are noticed, try tightening the caps slightly more or repeat step 4. If no leaks are noticed, return the filter to the upright position and allow the water to run 2-3 minutes until all cloudiness and discoloration have disappeared. With a piece of tape or label of some kind, note the date of this replacement on the bottom or back side of the filter housing. Be sure to replace the filter cartridges every 6 months for optimum performance.



a q u a s a n a[®]

Home Water Filters

866-NO-BOTTLE
www.aquasana.com
Sun Water Systems, Inc.
6310 Midway Rd.
Haltom City, TX 76117
Made in the U.S.A.